
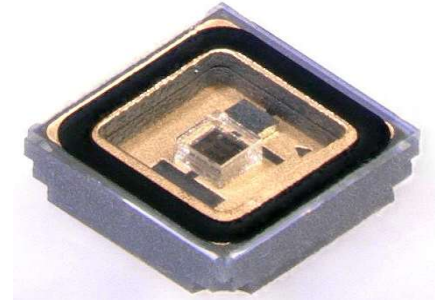


**DOWA**
**TENTATIVE**
**DoUVLEDs SMD**
**DOWA SUPERB UV LED SOLUTIONS**

## MODEL 325-FG-02-U05

### 3.5 x 3.5mm Metal Sealed SMD Flat Top Type

#### Mechanical Specifications and Materials (Unit: mm)

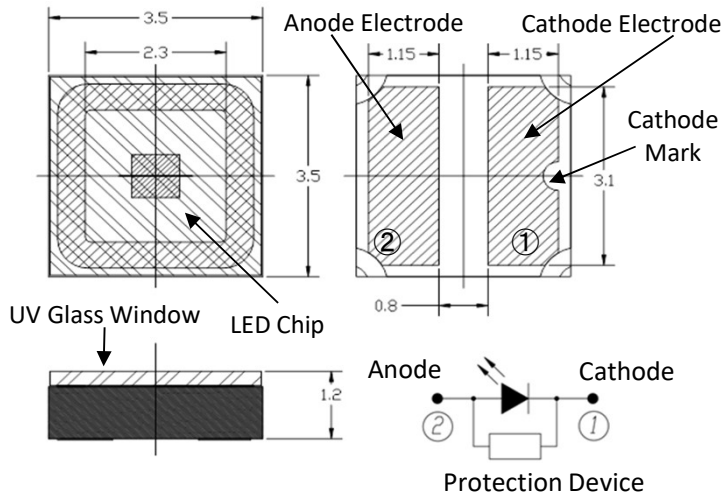

#### Typical Optical-Electrical Characteristics

 $(I_F=100\text{mA}, T_a=25^\circ\text{C})$ 

Item	Symbol	Unit	325-FG-02-U05		
			Min	Typ	Max
Peak Wavelength(*)	$\lambda_p$	nm	320	325	330
Radiant Flux(**)	$P_o$	mW	-	14	-
Full Width at Half Maximum	$\Delta\lambda$	nm	-	13	-
Forward voltage	$V_F$	V	-	5.1	-

(\*)Peak Wavelength Measurement tolerance is  $\pm 3\text{nm}$ .

(\*\*)Radiant Flux Measurement tolerance is  $\pm 10\%$ .

(\*\*\*)Junction-ambient

Specification and dimension are subject to change for improvement without notice.

Binning is available.

	<b>WARNING</b>
	<ul style="list-style-type: none"> <li>LEDs emit very strong UV radiation.</li> <li>Do not look at the LED light with the naked eye or irradiate the skin. UV radiation can harm your eyes and skin.</li> <li>To prevent UV radiation exposure, wear protective eyewear and protective equipment.</li> <li>If LEDs are embedded in devices, please indicate warning labels against the UV light LED used.</li> <li>Keep out of reach of children.</li> </ul>

**DOWA**
**TENTATIVE**
**DoUVLEDs SMD**
**DOWA SUPERB UV LED SOLUTIONS**


## MODEL 325-FG-02-U05

### 3.5 x 3.5mm Metal Sealed SMD Flat Top Type


#### Absolute Maximum Ratings

Item	Symbol	Unit	Value
Forward Current	$I_F$	mA	150
Junction Temperature	$T_J$	°C	90
Operating Temperature	$T_{OPR}$	°C	-30 ~ +85
Storage Temperature	$T_{STR}$	°C	-40 ~ +85 (No condensation)

#### Derating Curve

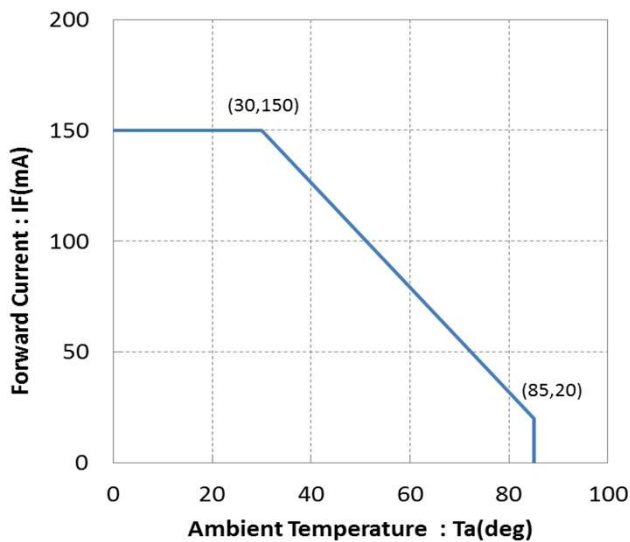


#### Recommended solder pad



Unit : mm

#### Reflow soldering profile

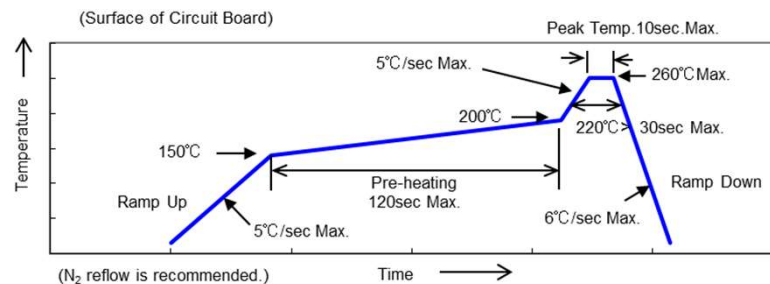

This soldering profile is according to JEDEC-J-STD-020D.

**DOWA**

**TENTATIVE**

**DoUVLEDs SMD**


**DOWA SUPERB UV LED SOLUTIONS**

## MODEL 325-FG-02-U05


### 3.5 x 3.5mm Metal Sealed SMD Flat Top Type

#### Reference Data(1)

##### Forward Voltage vs Forward Current

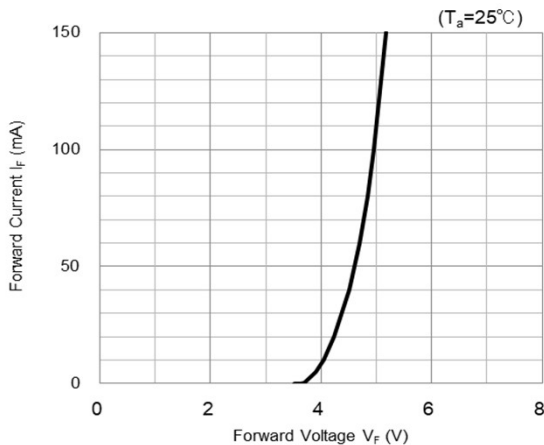

##### Forward Current vs Radiant Flux

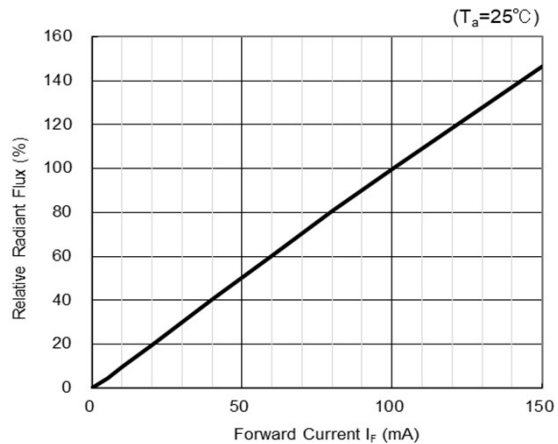

##### Spectrum

