



The Customer Company

ELECTRA COAT™


Clear Rubberized Coating

PROTECTS, SEALS, INSULATES

SEALS OUT


- Moisture
- Rust and Corrosion
- Salt and Road Chemicals
- Dust and Dirt

HIGH DIELECTRIC STRENGTH MAKES CLEAR GUARD IDEAL FOR USE ON EXPOSED ELECTRICAL TERMINALS AND CONDUCTORS.

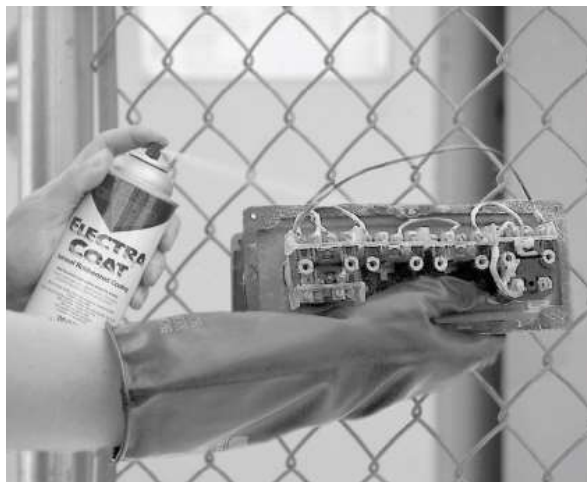

PRODUCT FEATURES & BENEFITS

- Dries to a tough, flexible rubberized coating that can be easily removed if necessary
- Clear formula is excellent when appearance is important
- High dielectric strength when cured*
- Impervious to water, even when submerged
- Will not freeze or crack in the cold
- Will not sag, drip, or peel
- Provides excellent abrasion resistance
- Soundproofs and rustproofs

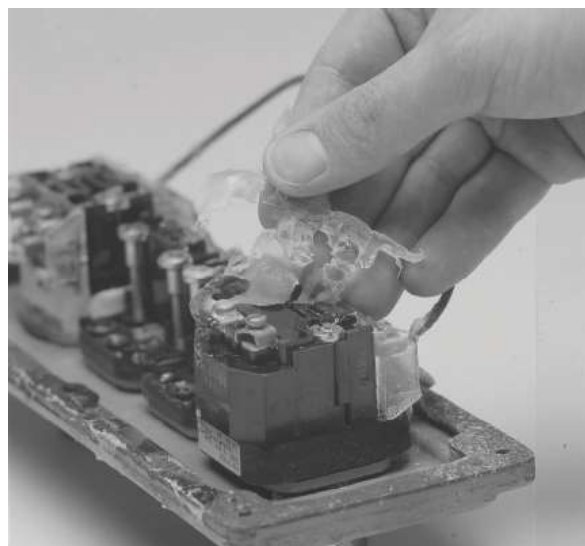

* The dielectric properties of ELECTRA COAT improve as its thickness is increased. A 1/8-inch coating will provide a dielectric strength of 37,000 volts.

Consult the label for complete directions and precautions before using this product.



xxxxxxx (0M808)

CERTIFIED LABORATORIES

A Division of NCH Corporation
P.O. Box 2493, Ft. Worth, Texas 76113-2493
Kendall Park, NJ • Mountain View, CA
Call TOLL-FREE: 1-800-527-9929
FAX: 1-800-456-0121
www.certifiedlabs.com
©2008 NCH Corporation



The Customer Company

ELECTRA COAT™

Clear Rubberized Coating

INDUSTRIES / CLIENTS

- Apartment Complexes
- Schools
- Municipalities
- Office Buildings
- Healthcare
- Building Maintenance

AREAS OF APPLICATION

- A/C Condensate Pans
- Drain Systems
- Exposed Electrical Terminals and Conductors
- Rain Gutters
- Roofs
- Utility Meters
- Auto Frames
- Battery Terminals
- Distributor Caps

EQUIPMENT

AeroHandle



CODE 5687

TECHNICAL SPECIFICATIONS

Boiling Point (F)	N/E	Specific Gravity (H ₂ O=1)	0.90
Vapor Pressure (mm Hg)	<75 PSI	Color	Colorless/Light Straw
Vapor Density (Air=1)	>1	Odor	Aromatic Solvent
pH @ 100%	N/A	Clarity	Transparent/Hazy
% Volatile by Volume	88	Evaporation Rate (BuAc=1)	<1
H ₂ O Solubility	Negligible	Viscosity	Semi-Viscous

PRODUCT CODE: 5687



CLEAR GUARD

透明橡膠電器保護膜


可易於移除的堅硬防護塗層

產品特色

- 完全透明
- 不會凹陷、滴落或脫落
- 靈活度高
- 介電强度高
- 提供最佳耐磨性

優點

- CLEAR GUARD把水分排除在外，即使浸在水中，不會被水滲透，也不會被沖掉。
- CLEAR GUARD在寒冷環境下不會結冰或龜裂。
- CLEAR GUARD適用於電氣設備、車輛輪艙和輪框、溝槽、屋頂材料、排水設備、空調系統冷凝器盤、通風管，或需要橡膠塗層的任何地方。也可用於隔音或防銹處理。

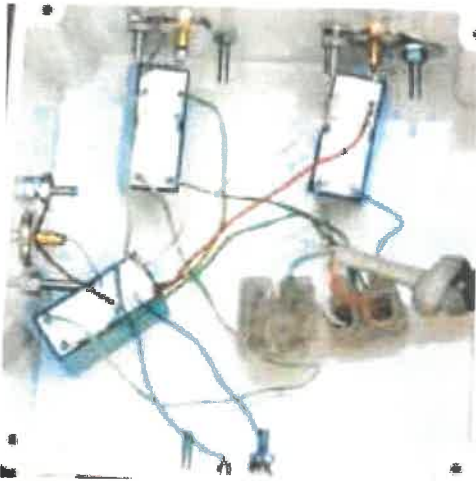

適用範圍

- 工廠
- 倉庫
- 運輸系統
- 學校
- 醫院
- 辦公大樓
- 公寓
- 汽車經銷商和租車商
- 維修保養廠
- 公用設施
- 鐵路
- 暴露的電氣接頭和導體
- 輪艙、汽車車架、車身底座搖板
- 保險桿
- 油箱、油底殼
- 金屬管道
- 牆縫
- 電池接頭和分電盤蓋
- 水電瓦斯錶

技術資料

* 使用本產品前，請先詳閱標籤上的完整指示和注意事項。

* 更多技術資料，請參閱本產品的安全資料表。

介電強度

37 KV (厚度3MM)

涵蓋面積

每罐可達1.5平方公尺

最高連續溫度

93°C

註

請勿在運轉中的電動馬達或通電的電線上使用。
使用本產品前，請先切斷所有電氣設備電源，完全乾透後再行通電。

厚度增加，介電性質會更好