LK6622 series fan-and-filter

148.5x148.5mm | 65-85 m³/h

Colour	RAL7035,color can be customized
Protection category	IP54 standard

EMC Fan and filter

Exit filter LK 6622.300

Dimensions

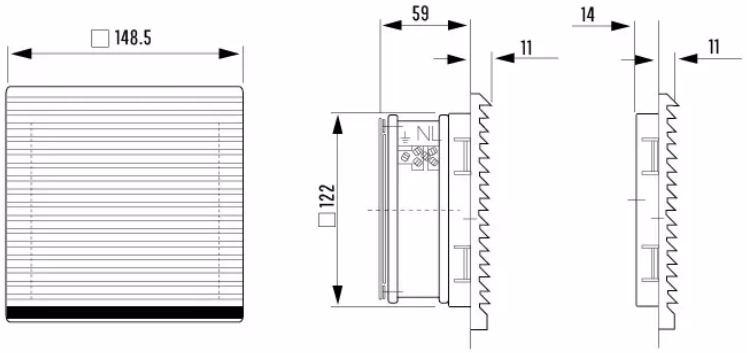



Characteristics of static pressure

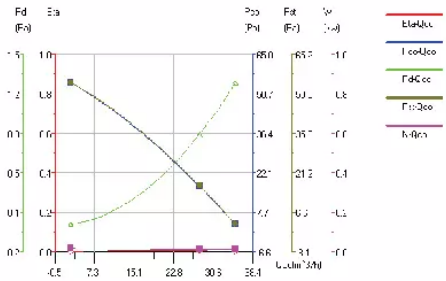

Model No.fan-and-filter unit LK	6622.230-LK	6622.115-LK	6622.024-LK
Model No.fan-and-filter unit EMC	6622.230-EMC	6622.115-EMC	6622.024-EMC
Rated operating voltage,frequency V,Hz	230V, 50/60Hz	115V, 50/60Hz	24V (DC)
Air throughput,unimpeded air flow	65-85 m³/h		85 m³/h
Air throughput with Exit filter including standard filter mat	1 x LK 6622.300: 55-70 m³/h		
Axial fan	Self-starting shaded pole motor		DC motor
Rated current max.	0.12-0.10 A	0.24-0.20 A	0.35 A
Rated Power	19.0-14.0 W		7.7 W
Noise level	36-40 dB(A)		40 dB(A)
Operating temperature range	-30 - +70℃		
Model No. Exit filter LK / EMC	6622.300 / 6622.300-EMC		
Design	Made of injection-moulded thermoplastic, customizable flame retardant materials, model LK6622,consistent with UL94-V0 self-extinguishing.		