
UV Sensor

YL-2023F-UVBDS(A)

FEATURES

- UVB sensing with 16-bit resolution
- Support UV index measurement (0~16)
- Programmable gain and integration time
- I²C slave interface up to 400KHz
- Power management modes
- Shutdown current : 0.8uA typical
- Supply voltage of 2.2V to 3.6V
- 2.0mm×2.3mm×1.4mm , 4-pin COBpackage

GENERAL DESCRIPTION

YL-2023F-UVBDS(A) supports integrated functions of ultraviolet light sensors such that can be easily configured and used in user applications. YL-2023F-UVBDS(A) comprises photodiodes, amplifiers, ADC, digital control logic and I²C interface circuit. The YL-2023F-UVBDS(A) receives UVB and outputs digital count according to the intensity. Power consumption can be minimized by proper use of power management mode,.

APPLICATIONS

Smartphone, Wearable devices, IoT, watch, weather station, bicycle navigation, gaming, accessory

FUNCTIONAL BLOCK DIAGRAM

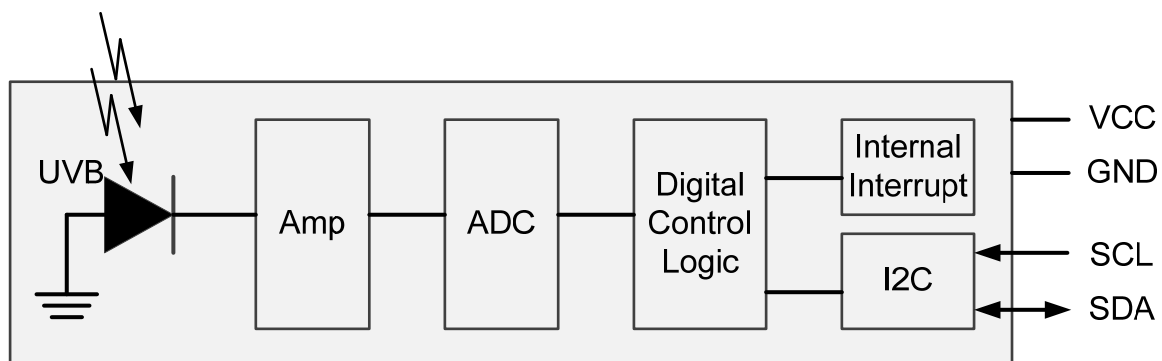


Table of Contents

FEATURES	1
APPLICATIONS	1
GENERAL DESCRIPTION	1
FUNCTIONAL BLOCK DIAGRAM	1
1. SPECIFICATIONS	3
2. ABSOLUTE MAXIMUM RATINGS	4
3. PIN CONFIGURATION AND DESCRIPTION	5
4. PACKAGE INFORMATION	6
5. APPLICATION CIRCUITS	7
6. FUNCTIONAL DESCRIPTION	8
6.1. SYSTEM RESET	8
6.2. POWER MANAGEMENT MODES	8
6.3. UVB SENSING OPERATIONS	8
6.4. RESOLUTION AND RANGE	9
7. REGISTER MAP	10
8. I²C INTERFACE	13
9. TYPICAL CHARACTERISTICS	16

SPECIFICATIONS

Unless otherwise noted, all the measurement results are based on $T_A=25^{\circ}\text{C}$ and $V_{CC}=3.0\text{V}$. Typical specifications are not guaranteed while all the minimum and maximum specifications are guaranteed.

Table 1.1 Electrical characteristics

Symbol	Parameter	Condition	Min.	Typ.	Max.	Units
Functional						
V_{CC}	Power supply voltage		2.2	3.0	3.6	V
V_{OH}	High-level output voltage		1.22			V
V_{OL}	Low-level output voltage				0.4	V
V_{IH}	High-level input voltage		$0.8 * V_{CC}$			V
V_{IL}	Low-level input voltage				$0.2 * V_{CC}$	V
I_{DD}	Current consumption	Normal mode		150	160	μA
I_{DS}		Shutdown mode		0.8	1	
F_{I2C}	I ² C clock frequency		1		400	kHz
T_{ADC}	ADC conversion time	RES=011(100ms)	95	100	105	ms
ADC_f	Full scale ADC code	RES =011(100ms)			65535	LSB
ADC_d	ADC code for dark current	RES =011, RANGE_UVB = 011,		0	3	LSB
T_{OP}	Operating temperature		-30		85	$^{\circ}\text{C}$
UVB						
	Wavelength		240		320	nm
I_{PH}	Photo Current	306nm UVB 4W Lamp,		16.1		nA
ADC_{UVB}	ADC code for UVB	306nm UVB 4W Lamp,		TBD		LSB


1. ABSOLUTE MAXIMUM RATINGS

Stresses above these listed absolute maximum ratings may cause permanent damage to the device. Exposure beyond specified electrical characteristics may affect the device reliability or cause malfunction.

Table 2.1 Absolute Maximum ratings

Symbol	Parameter	Min	Max	Units
V _{CC}	Power supply voltage	-0.3	3.6	V
V _{IO}	Digital I/O signal voltage	-0.3	3.6	V
ESD	HBM		2	kV
	CDM		700	V
T _{OP}	Operating temperature	-30	+85	°C
T _{STORE}	Storage temperature range	-40	+85	°C
T _{SOLDER}	Soldering temperature (peak temperature duration: 10s)		260	°C

2. PIN CONFIGURATION AND DESCRIPTION



2mm x 2.3mm COB package (1.4mm thickness)

Figure 3.1 Pin configurations (Top view)

Table 3.1 Pin description

Pin #	Name	I/O Type	Description
1	GND	Ground	Ground
2	SDA	Digital in/out	I ² C data line
3	SCL	Digital input	I ² C clock line
4	VCC	Supply	Supply voltage

3. PACKAGE INFORMATION

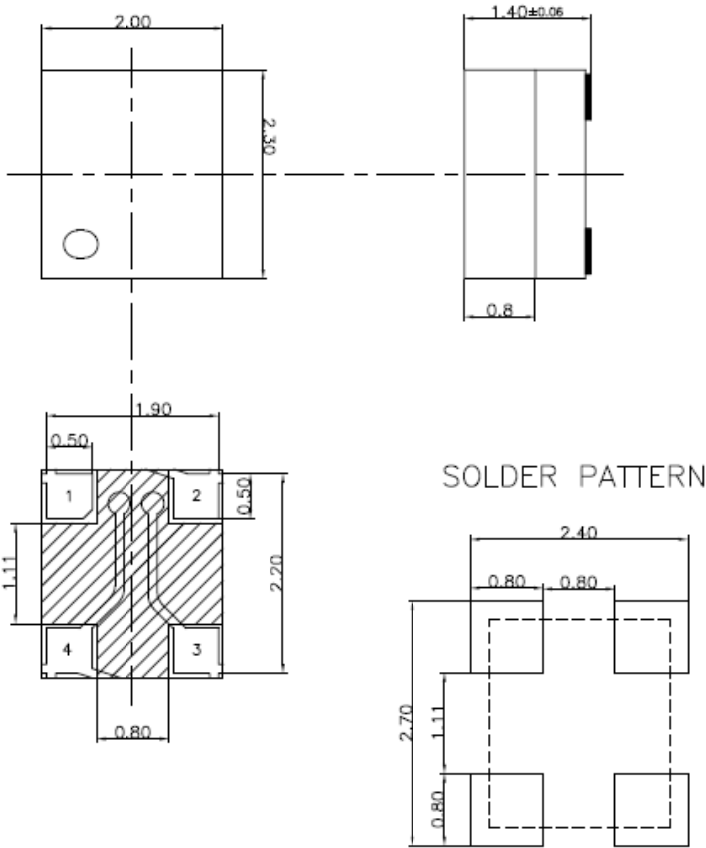



Figure 4.1 Package outline dimension

4. APPLICATION CIRCUITS

C_{VCC} is used to reduce the power supply noise, and also should be placed near pin 4. For the I²C operation, SDA and SCL need pull-up resistors. The recommended component values are in Table 5.1.

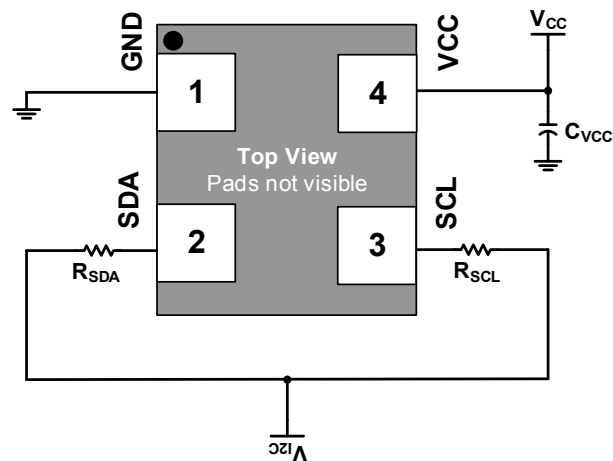


Figure 5.1 Application circuit

Table 5.1 Recommended values

Components	Recommended values
C_{VCC}	1uF
R_{SCL}	4.7k Ω
R_{SDA}	4.7k Ω

5. FUNCTIONAL DESCRIPTION

YL-2023F-UVBDS(A) is an integrated circuit of an UVB sensor and ROIC. It includes on-chip photodiodes, ADCs, amplifiers, comparators and I²C interface. The photo detectors sense the amount of incident light for the UVB. The current generated by photo detectors is converted and measured by ADC and changed to 16-bit resolution digital data. The measured data can be delivered to host CPU via I²C serial interface. YL-2023F-UVBDS(A) can internally generate the interrupt signal to reduce the burden of host CPU by informing the occurrence of specified events.

Communication with host CPU is accomplished through I²C serial interface. The fastest speed of the interface is 400kHz.

SYSTEM RESET

System reset circuit is shown in Figure 6.1. When the system reset signal is generated, all the internal registers are initialized. System reset signal is generated from either POR (power-on-reset) circuit or SoftReset signal. POR circuit releases reset signal when VDD signal rises to the specified voltage after power up. The SoftReset signal is generated when host CPU writes 0xA5 value to the register of address 0x0B.

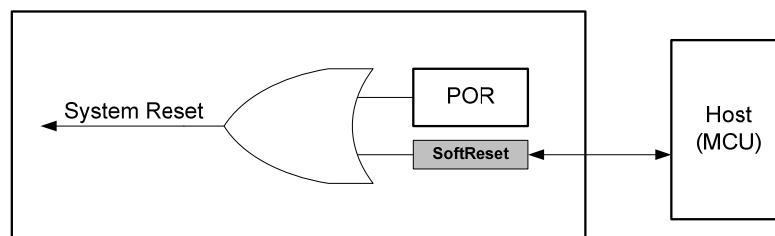


Figure 6.1. System reset circuit

POWER MANAGEMENT MODES

YL-2023F-UVBDS(A) supports 4 power management modes to save power consumption;

- normal mode
- low-power mode
- auto-shutdown mode
- shutdown mode

As soon as power is up, YL-2023F-UVBDS(A) enters into shutdown mode. In normal mode, the amount of UVB is repetitively measured according to the value of OPER field. In low-power mode, all the other circuits except system management and host interface circuits are periodically deactivated to save power consumption. The power consumption is minimized in shutdown mode as all the circuits except host interface are disabled. In auto-shutdown mode, UVB sensing operation is executed once and

behave as shutdown mode. The power management mode can be selected by PMODE[1:0] field of MODE register at address 0x01.

UVB SENSING OPERATIONS

In other modes except shutdown mode, the sensing operation can be set as follows;

In UVB operation, the photodiode for UVB is used to detect the amount of incident light. The measured data is output to UVB register at address 0x17 and 0x18.

The sensing operations are selected by the value of OPER field of MODE register at address 0x01.

Figure 6.2 shows the possible sensing operations in the normal mode. Figure 6.3 shows the low-power and auto-shutdown mode operations. The sleep duration is

controlled by SLP_PER[1:0] field of MODE_CTL register at address 0x0A.




Figure 6.2. Normal mode operations

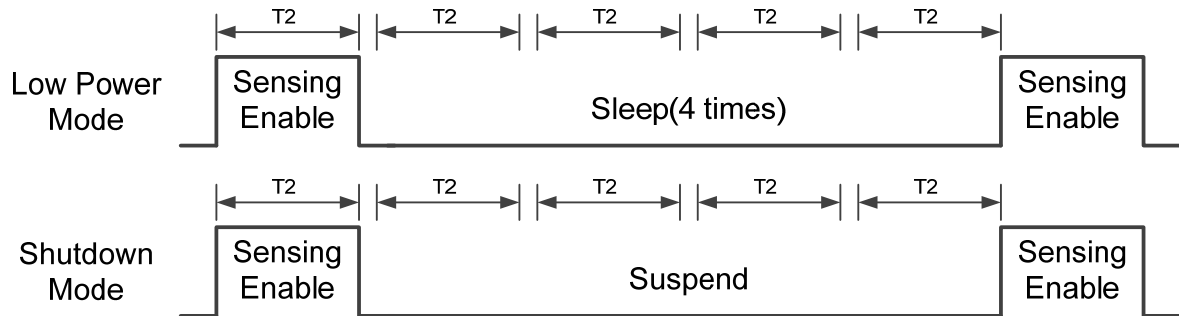


Figure 6.3. Low-power and shutdown mode operations

RESOLUTION AND RANGE

Resolution defines how finely the incident light can be measured. And it is proportional to ADC measuring time. If the ADC measuring time is increased by 2 times, the resolution can be increased by 1 bit.

The resolution for sensor is selected by RES[2:0] field of RES register at address 0x04. The default resolution for sensor is 16 bits and the measuring time is 100ms.

In sensing operation, if the resolution is over 16 bits, the upper 16 bits of the measured result is output as measured data.

Range controls the full range of intensity of the

incident light. In the case of incident light exceeding the full range(in other words, overflow), the maximum value of sensor is output as measured data. That is, the exact measured data can't be obtained. The range can be changed in order that the measured data is represented in the maximum value.

The range for sensor is selected by RANGE[2:0] field of RANGE register at address 0x05.

For example, the measurable range is to change x64 to x128, the measured data of x128 is represented as half value compared to that of x64 for the same incident light.

6. REGISTER MAP

There are 11 registers in YL-2023F-UVBDS(A). Those registers can be accessed through I²C interface from host CPU. The register map is shown in table 7.1.

All the reserved registers are recommended NOT to be read and written and the reserved fields are recommended to be filled with '0'.

Addr (Hex)	Alias	Bit								Init (Hex)
		7	6	5	4	3	2	1	0	
0x00	CHIPID	CHIPID[7:0]								0x62
0x01	MODE	Reserved		UVB_EN		Reserved		POWER_MODE[1:0]		0x03
0x02	Reserved	Reserved								
0x03	Reserved	Reserved								
0x04	RES_UV	Reserved				RES_UV[2:0]				0x03
0x05	Reserved	Reserved								
0x06	Reserved	Reserved								
0x07	RANGE_UVB	Reserved				RANGE_UVB[2:0]				0x03
0x08	Reserved	Reserved								
0x09	Reserved	Reserved								
0x0A	MODE_CTL	SLEEP_PERIOD[3:0]				Reserved				
0x0B	SOFT_RESET	SOFT_RESET[7:0]								0x00
0x0C~0x14	Reserved	Reserved								
0x15	Reserved	Reserved								
0x16	Reserved	Reserved								
0x17	UVB_LSB	UVB[7:0]								ReadOnly
0x18	UVB_MSB	UVB[15:8]								ReadOnly
0x19~0x2F	Reserved	Reserved								
0x30	NVM_Read_ctrl	NVM Read Address[7:0]								
0x31	NVM_MSB	NVM(non-volatile memory)data output [15:8]								ReadOnly
0x32	NVM_LSB	NVM(non-volatile memory)data output [7:0]								ReadOnly

Table 7.1 Register map

Register 0x00 – CHIPID

D7	D6	D5	D4	D3	D2	D1	D0
CHIPID							

It stores CHIPID. The CHIPID always maintains '0x62'.

Register 0x01 – MODE

D7	D6	D5	D4	D3	D2	D1	D0
		OPER[1:0]				PMODE[1:0]	

This field controls UVB sensing operation. According to the value, UVB sensing operation can be enabled or disabled.

Table 7.2 Sensor Operations

OPER[1 :0]	Operations
00	No operation
01,11	Not used
10	UVB operation

PMODE[1:0]

This field controls the power management modes. Initial state is shutdown mode.

Table 7.3 Power management modes

PMODE	Power Management modes
00	Normal mode
01	Low-powermode
10	Auto shutdown mode
11	Shutdown mode

Register 0x04 – RES_UV

D7	D6	D5	D4	D3	D2	D1	D0
					RES_UV [2:0]		

RES_UV[2:0]

This field defines the measuring period of sensor operation. The default value is '011'.

Table 7.4Sensor resolution

RES UV[2:0]	Resolution	Sensor measuring
000	16bits	800ms
001	16bits	400ms
010	16bits	200ms
011	16bits	100ms
100~111	-	Not used

Register 0x07 – RANGE_UVB

D7	D6	D5	D4	D3	D2	D1	D0
					RANGE_UVB[2:0]		

RANGE_UVB[2:0]

This field defines the range of UVB operation. The default value is '011'.

Table 7.6UVB range

RANGE UVB[2:0]	Measurable
000	x1
001	x2
010	x4
011	x8
100	x16
101	x32
110	x64
111	x128

Register 0x0A – MODE_CTL

D7	D6	D5	D4	D3	D2	D1	D0
		SLP_PER[2:0]					

SLP_PER[2:0]

This field defines sleep duration in low-power mode. The sleep duration is based on measuring time of each operating mode.

Table 7.7Sleep duration

SLP PER[2:0]	Sleep duration
000	2 times
001	4 times
010	8 times
011	16 times
100	32 times
101	64 times
110	128 times
111	256 times

Register 0xB – SOFT_RESET

D7	D6	D5	D4	D3	D2	D1	D0
SOFT_RESET							

SOFT_RESET[7:0]

If 0xA5 is written into this register, all the circuits and registers are initialized. Since it is

auto-cleared, it always indicates 0x00 when host CPU reads it out.

It should be noted that applying SOFT_RESET should be done only when POWER_MODE='00'.

Register 0x17 – UVB_LSB

D7	D6	D5	D4	D3	D2	D1	D0
UVB[7:0]							

UVB[7:0]

UVB data lower 8 bits.

Register 0x18 – UVB_MSB

D7	D6	D5	D4	D3	D2	D1	D0
UVB[15:8]							

UVB[15:8]

UVB data upper 8 bits.

Register 0x30 – NVM Read Control

D7	D6	D5	D4	D3	D2	D1	D0
NVM address for read							

NMV address[7:0]

If NVM(non-volatile memory) address is written into this register,NVM gives out the memory content through NVM data output registers (register 0x31, 0x32)

Table 7.8 NVM address for read

address	NVM READCONTENT
0x0A	offset
0X0C	B_Scale

Example) - Offset

```
//Read the value of NVM ADDRESS
0x0A(offset)
```

```
// ***** NVM Read Command***** //
`I2C_WRITE(`DEVADDR, 8'h30, 8'h0A ); // NVM
ADDRESS
//As the data size of Offsetis 8bit, Offset data
can be read out through NVM MSB
register(0x31)
Offset = I2C_READ(`DEVADDR, 8'h31); // NVM
DATA MSB [15:8]
// ***** NVM DataRead Command***** //
B_Scale_msb = I2C_READ(`DEVADDR, 8'h31); //
NVM DATA MSB [15:8]
```

Example) – B_Scale

```
//Read the value of NVM ADDRESS 0x0C(B_
Scale)
// ***** NVM Read Command***** //
`I2C_WRITE(`DEVADDR, 8'h30, 8'h0C ); // NVM
ADDRESS
```

```
//As the data size of B_Scale is 16bit,so
through I2C need to read for a two times
// ***** NVM DataRead Command***** //
B_Scale_msb = I2C_READ(`DEVADDR, 8'h31); //
NVM DATA MSB [15:8]
B_Scale_lsb = I2C_READ(`DEVADDR, 8'h32); //
NVM DATA LSB [15:8]
```

Register 0x31 – NVM_MSB

D7	D6	D5	D4	D3	D2	D1	D0
NVM data[15:8]							

NVM data[15:8]

NVM data upper 8 bits.

Register 0x32 – NVM_LSB

D7	D6	D5	D4	D3	D2	D1	D0
NVM data[7:0]							

NVM data [7:0]

NVM data lower 8 bits.

7. I²C INTERFACE

I²C slave interface is implemented on the basis of "I²C Specification UM10204 Rev. 03 (19 June 2007)". The 7-bit device address is "0111001", which can be modified by bonding option.

To explain the read/write operations of I²C interface, some abbreviations are introduced as follows.

Table 8.1 Abbreviations

Abbr.	Operation
S	Start condition
Sr	Repeated start condition
P	Stop condition
ACKS	Acknowledged by slave
ACKM	Acknowledged by master
NACKS	Not acknowledged by slave
NACKM	Not acknowledged by master

In write operation, after host CPU sends start signal, first byte contains read/write mode and device address information. MSB 7 bits of first byte express device address and last bit indicates read ('1') or write ('0'). As soon as slave receives data, it needs to respond ACKS or NACKS. If host CPU receives ACKS, it sends the register address to YL-2023F-UVBDS(A). Last transfer starts to send register data being written to its address. When the received information is NACKS, host CPU should finish the communication as sending stop condition. Likewise, host CPU sends stop condition after normal operation completion.

I²C burst write operation was implemented to send registers continuously. In figure 8.2, the fourth and fifth bytes can be continuously sent to slave without stop condition. The register address increments automatically and I²C slave receives data. The burst write does not finish until host CPU sends stop signal.

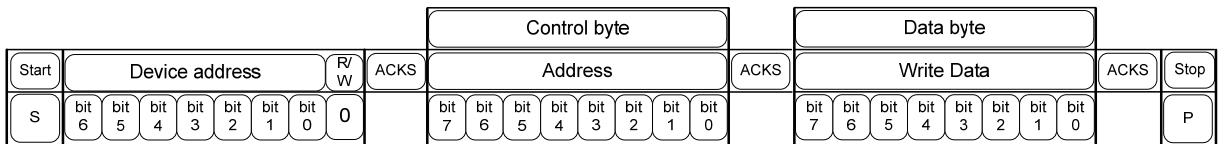


Figure 8.1 I²C single write operation

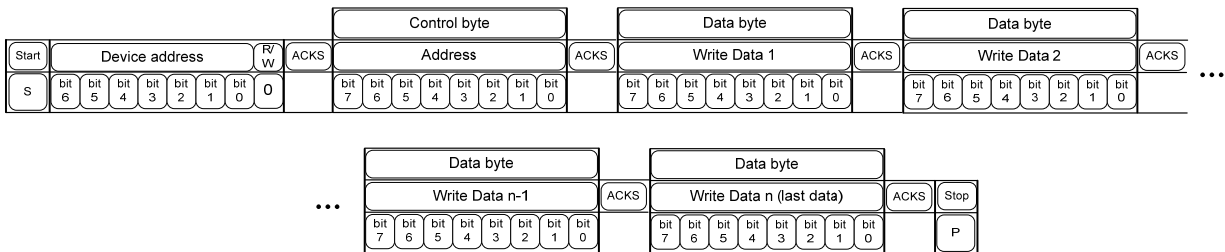


Figure 8.2 I²C burst write operation

I²C read operation consists of two stage. The first communication terminates when host CPU sends stop condition after the first byte transfer for device address setting and the second byte transfer for slave address setting is completed. Secondly, host CPU sends start condition again, device address and read mode '0' as the first byte for read operation. And then I²C slave should send register data of the corresponding register address defined in the previous stage. For I²C burst read operation, if host CPU sends SCL clock continuously, I²C slave must send data in consecutively increasing address order. To terminate the communication, stop condition should be sent to I²C slave.

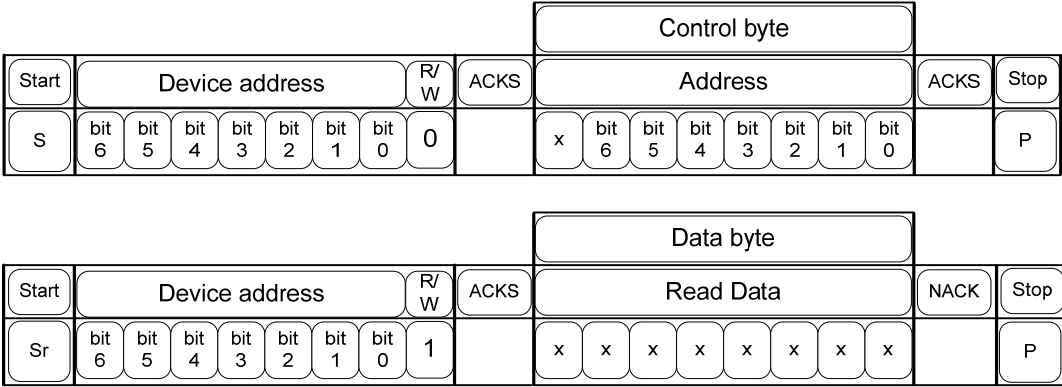


Figure 8.3 I²C single read operation

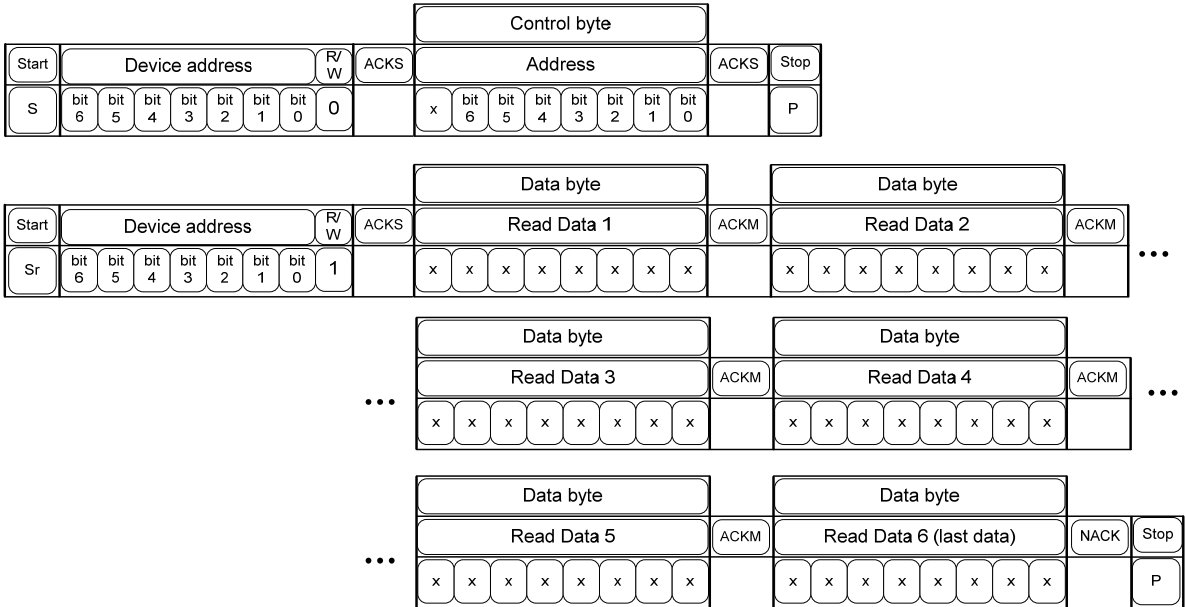


Figure 8.4 I²C burst read operation

The timing parameters and timing diagram for I²C operations are shown in table 8.2 and figure 8.5 as follows.

Table 8.2 I²C timing parameters

Symbol	Parameter	Condition	Min	Typ	Max	Units	Test
SCL Freq	SCL frequency				400	KHz	Q
T _F	Fall time				300	ns	Q
T _R	Rise time				1000	ns	Q
T _{HIGH}	SCL high time		0.6			μs	Q
T _{LOW}	SCL low time		1.3			μs	Q
T _{SUSTA}	Start condition setup time		0.6			μs	Q
T _{HDSTA}	Start condition hold time		0.6			μs	D
T _{HD}	Data hold time		0.0			μs	Q
T _{SU}	Data setup time		0.1			μs	Q
T _{SUSTO}	Stop condition setup time		0.6			μs	Q
T _{BUF}	Bus free time		1.3			μs	Q

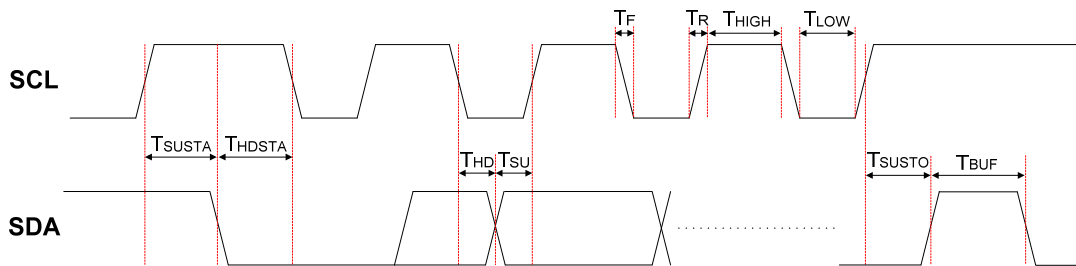


Figure 8.5 I²C timing diagram

8. TYPICAL CHARACTERISTICS

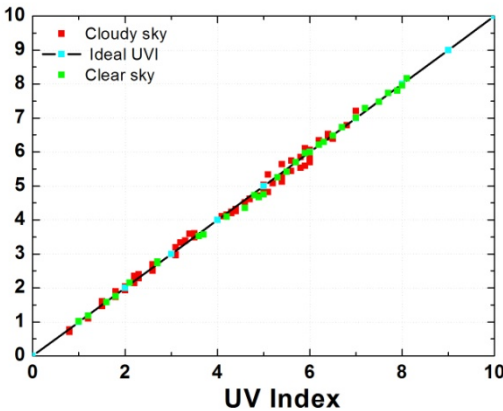


Figure9.1 Output data – UV Intensity Characteristics

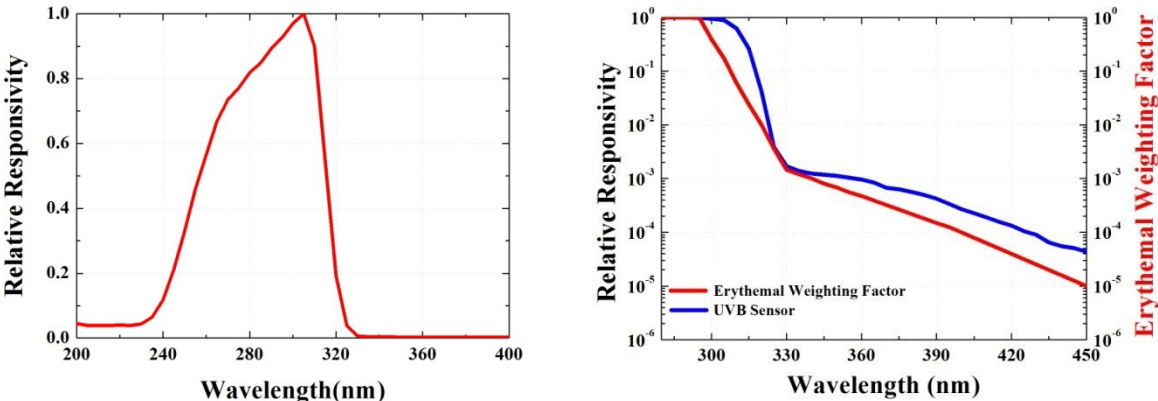


Figure9.2Spectral Responsivity Characteristics

YesLED UV sensor (UVB sensor) response at only UV range, so the accuracy is higher than that.