

Product Specifications

Model number	YL-EU31.4W-5K	YL-ED31.4W-5K	YL-EU31.4W-27K	YL-ED31.4W-27K	YL-EU49.3W-5K	YL-ED49.3W-5K	YL-EU49.3W-27K	YL-ED49.3W-27K
Installation	上向き	下向き	上向き	下向き	上向き	下向き	上向き	下向き
Color temperature	5,000 K		2,700 K		5,000 K		2,700 K	
Instrument light flux	2,200 lm		1,900 lm		3,600 lm		3,100 lm	
Color rendering property	Ra 68				Ra 68			
Power consumption	31.4 W				49.3 W			
Waterproof performance	IP 54							
Light source lifetime	40,000 h							
Size	Φ 130.5mm × 250mm							
Weight	1.2 kg							

Properties

E39 base
Compatible
item

Upward facing
downward
For installation
2 types of light
distribution


lightweight
Weight about
1.2 kg

40/60 VA
2 types


Waterproof /
dustproof
IP 54

Dustproof
With cover

Luminous intensity distribution

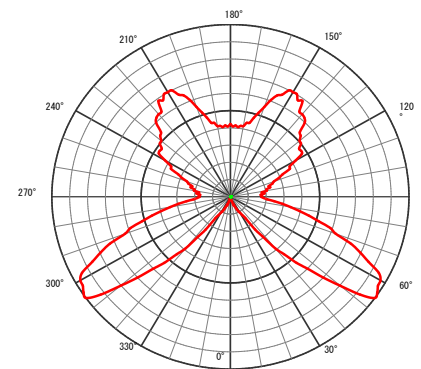

上向き取り付け

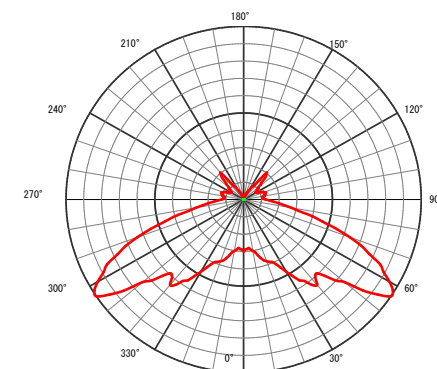

下向き取り付け